


**THREAD FORMING SCREWS**

**Pan Hd Six-Lobe Plastite® /  
Plas-Fix®-45 Alternatives**

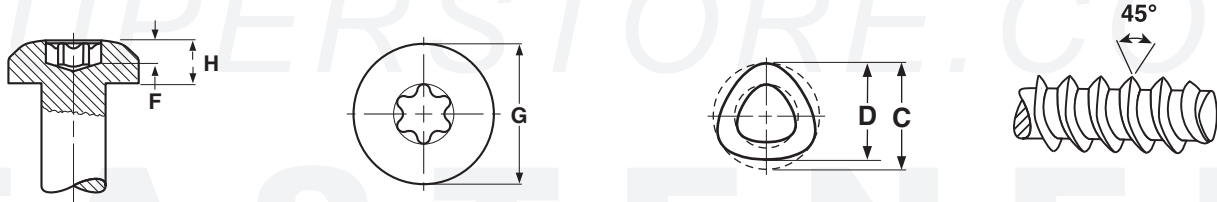

**PAN SIX-LOBE PLASTITE® PLAS-FIX® 45° ALTERNATIVE THREAD ROLLING SCREWS**

Nominal Screw Size	G		T		F	Driver Size	C		D		Minimum Out-Of-Round	Recommended Pilot Hole Sizes	
	Head Diameter		Head Height		Recess Depth		Diameter of Circumscribing Circle		Measurements Across Center			Min	Max
	Max	Min	Max	Min	Min		Max	Min	Max	Min		Max	
M2.5	4.00	3.70	1.60	1.46	0.64	T6	2.55	2.41	2.5	2.37	.05	1.85	2.05
M3	5.00	4.70	1.95	1.81	0.76	T8	3.05	2.92	3	2.87	.05	2.30	2.50
M3.5	6.00	5.70	2.30	2.16	0.89	T10	3.55	3.42	3.5	3.34	.08	2.75	3.00
M4	7.00	6.61	2.45	2.31	1.14	T15	4.06	3.89	4	3.79	.10	3.20	3.45
M5	8.00	7.64	2.80	2.66	1.40	T20	5.06	4.89	5	4.79	.10	3.70	4.10
<b>Tolerance on Length</b>							M2 thru M5, up to 20mm: ±0.8		M2 thru M5, Over 20mm: ±1.3				

<b>Description</b>	Trilobular thread-rolling screw with extra wide spacing between 45° profile threads and a single lead thread that extends from the blunt point. Head is gently rounded with a hexlobular recess for driving the screw.
<b>Applications/Advantages</b>	Thermoplastics, engineering resins and certain thermosets. Sharper thread profile increases holding strength while reducing material displacement. Drive and strip torques are higher, reducing the need for inserts or reinforcing clips.
<b>Material</b>	<b>Steel</b> AISI 1022 steel
<b>Heat Treatment</b>	Screws shall be quenched in liquid and then tempered by reheating to 650°F minimum.
<b>Case Hardness</b>	HV 450 minimum
<b>Case Depth</b>	<b>M2 thru M3.5 diameters:</b> 0.05 - 0.18 mm <b>M4 &amp; M5 diameters:</b> 0.10 - 0.25 mm
<b>Core Hardness (after tempering)</b>	HV 250 - 380
<b>Plating</b>	Screws have a RoHS-compliant zinc finish.

Plastite® is a registered trademark of REMINC. Kanebridge's screws are not authorized or made by licensed REMINC manufacturers. Plas-Fix® is a registered trademark of Lancaster Fasteners Co. Ltd.. Kanebridge's screws are not authorized or made by licensed Lancaster Fastener manufacturers.