


Flat Head

SOCKET CAP SCREWS

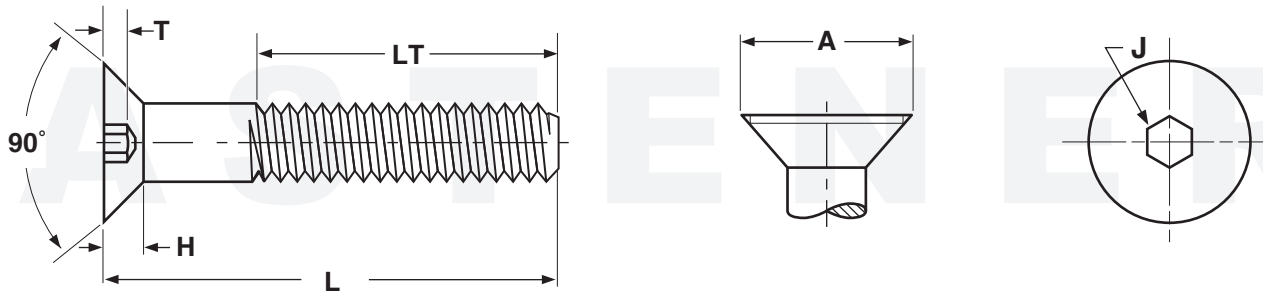

METRIC - FLAT HEAD SOCKET CAP SCREWS, HIGH ALLOY STEEL PER ASTM F835M

ANSI/ASME B18.3.5M

Nominal Size	Thread Pitch	B		A		H		J	T	W	D
		Body Diameter		Head Diameter		Head Height		Hex Socket Size	Key Engagement	Wall Thickness	Drill Allowance
		Max	Min	Theoretical Sharp	Absolute Min.	Ref	Flush Tolerance	Nom	Min	Min	Max
M3	0.5	3.00	2.86	6.72	5.35	1.86	0.30	2.0	1.1	0.25	0.3
M4	0.7	4.00	3.82	8.96	7.80	2.48	0.30	2.5	1.5	0.45	0.4
M5	0.8	5.00	4.82	11.20	9.75	3.10	0.35	3.0	1.9	0.66	0.5
M6	1	6.00	5.82	13.44	11.70	3.72	0.35	4.0	2.2	0.70	0.6
M8	1.25	8.00	7.78	17.92	15.60	4.96	0.40	5.0	3.0	1.16	0.8
M10	1.5	10.00	9.78	22.40	19.50	6.20	0.50	6.0	3.6	1.62	0.9
Tolerance on Length		Up to 16mm, incl.: ±0.3			Over 16mm to 60mm, incl.: ±0.5			Over 60mm to 150mm, incl.: ±0.8			

<b>Description</b>	Has a similar design as a metric socket button head screw but has a 90° countersunk flat head.
<b>Applications/Advantages</b>	Used when a flush mounting, high strength screw is required. Commonly used in tools and dies where moving parts pass over the fastened area.
<b>Material</b>	Metric socket flat head cap screws shall be made from an alloy steel which conforms to the following chemical composition requirements- <b>Carbon:</b> 0.28-0.50%; <b>Phosphorous:</b> 0.035% maximum; <b>Sulfur:</b> 0.035% maximum.
<b>Heat Treatment</b>	Metric socket flat head cap screws shall be heat treated by quenching in oil from above the transformation temperature and reheating to a tempering temperature of 380°C minimum.
<b>Hardness</b>	Rockwell C 38 - 44
<b>Tensile Strength</b>	<b>Full-size screws:</b> 1040 MPa minimum; <b>Machined test specimen:</b> 1220 MPa minimum
<b>Yield Strength</b>	<b>Machined test specimen:</b> 1100 MPa minimum
<b>Elongation in 5D</b>	8% minimum
<b>Reduction of Area</b>	35% minimum
<b>Plating</b>	Metric socket flat head cap screws are usually supplied with a plain finish.