


Rivets

Stainless High Strength, Double Locking

Orlock® brand,
Dome Head

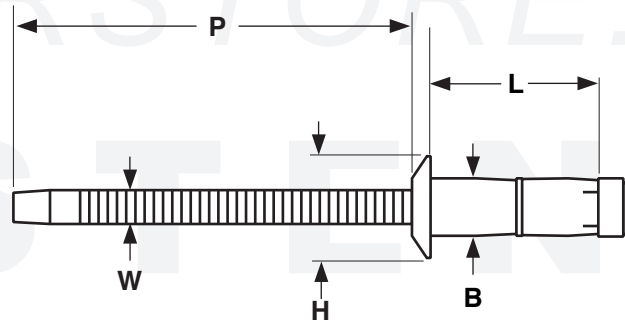

DOME ORLOCK® STAINLESS HIGH STRENGTH BLIND RIVETS										Ornit
Nominal Rivet Diameter & Material	Part Number	L	Grip Range	W	B	Recommended Hole Size	H	D	Typical Tensile Strength (Kgf.)	Typical Shear Strength (Kgf.)
		Rivet Length (±.012)		Mandrel Nail Diameter (+.003, -.002)	Body Diameter (±.002)		Head Height (±.008)	Head Diameter (±.012)		
1/4 Stainless/ Stainless	LN64105P	.413	.078 - .177	0.165	0.251	0.259 - 0.263	0.118	0.512	850	1440
	LN64125P	.491	.157 - .256							0.255 - 0.259
	LN64145P	.570	.196 - .334			1480				
	LN64165P	.648	.275 - .413							
	LN64185P	.727	.353 - .492							

Description	A blind fastener with a self-contained mandrel. The body of the rivet has a dome-shaped head and a shank which tapers slightly where it meets the mandrel head. The mandrel is designed with two sets of longitudinal grooves that provides internal friction at both ends of the fastening. The section of the mandrel that protrudes above the head of the rivet has circumferential serrations that helps the tool to grip the mandrel during installation. This top portion of the mandrel ultimately breaks away once the rivet has been installed.
Applications/ Advantages	The double-locking system ensures that the mandrel remains tightly fitted within the rivet body, rendering it highly resistant to vibration and water. The internal friction system with differential force load provides maximum clamp-up without deforming the materials being gripped. This rivet is designed for environments where a balance of resistance to corrosion and vibration exists.
Material	<i>All Stainless</i> Rivet Body: Austenitic Stainless AISI 304 Cu Mandrel: Austenitic Stainless AISI 304 Cu
Shear Strength	Typical shear strengths are listed in the above table.
Tensile Strength	Typical tensile strengths are listed in the above table.