


Gimlet Point, Steel

ACOUSTICAL LAG SCREWS

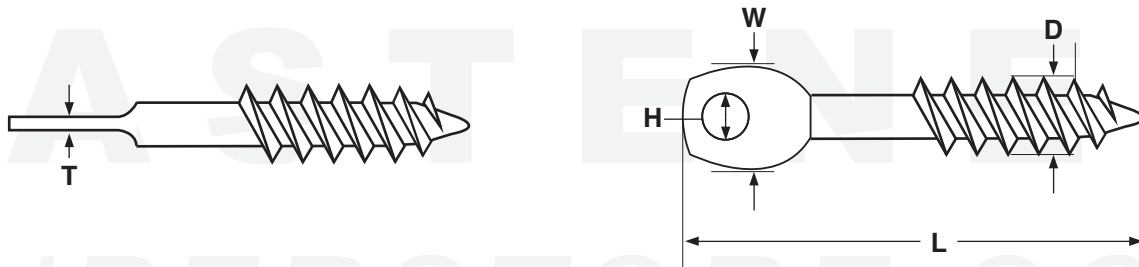

ACOUSTICAL EYE LAG SCREW, GIMLET POINT						
Nominal Diameter & Threads per Inch	H		T	W	D	
	Hole Diameter		Head Thickness	Head Width	Major Diameter	
	Max	Min	Ref	Ref	Max	Min
1/4 - 14	.220	.180	.080	.385	.246	.240

<b>Description</b>	An externally threaded fastener with a spaced thread pattern, tapered point, an an integrally formed circular shoulder (which can have a serrated bottom surface). Above the shoulder is an unthreaded section of shank that flattens at the top end of the screw. In the middle of the flattened "head is a hole.
<b>Applications/ Advantages</b>	Designed specifically for attaching drop ceiling tie wires to wood.
<b>Material</b>	AISI 1022 or equivalent steel
<b>Plating</b>	Acoustical lag screws are typically supplied with plain finish.