


**TYPE-17 FACE FRAMING** **Pan Phillips #7 Head  
Fine Thread**

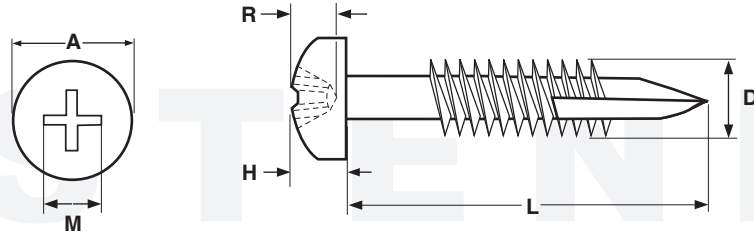

FACE FRAMING SCREWS - PAN PHILLIPS #7 HEAD, FINE THREAD										
Nominal Diameter & Threads per Inch	A		H		R		M	D		Driver Size
	Head Diameter		Head Height		Recess Penetration Gaging Depth		Recess Diameter	Major Diameter		
	Max	Min	Max	Min	Max	Min	Ref	Max	Min	
6-20	0.296	0.280	0.106	0.095	0.089	0.064	0.170	0.139	0.131	2
Tolerance on Length			Up to 1", Incl.				± 0.03			
			Over 1"				± 0.05			

<b>Description</b>	An externally threaded fastener with a dome-shaped head with a cross recess. The shank has an unthreaded section directly below the head, a fine thread pitch and a chip cavity cut out where the final several threads, ending at the tip.
<b>Applications / Advantages</b>	Designed for use in hardwoods for attaching a frame to the front of a cabinet structure to cover the edges of the cabinet. These are also referred to as "pocket hole" screws due to the type of hole into which the fastener is inserted. Such holes are drilled at an angle of approximately 15° into one workpiece and joined to the other piece by the screw. Such fastening methods don't require access to the inside of the joint to make repairs or adjustments.
<b>Material</b>	C1022 (or equivalent) case-hardened steel
<b>Surface Hardness</b>	Rockwell C45 minimum
<b>Core Hardness</b>	Rockwell C 28-38
<b>Torque</b>	28 kg/cm minimum
<b>Plating</b>	See Appendix-A for plating information