


**6-Prong
Straight Barrel**

Tee Nuts

Nuts

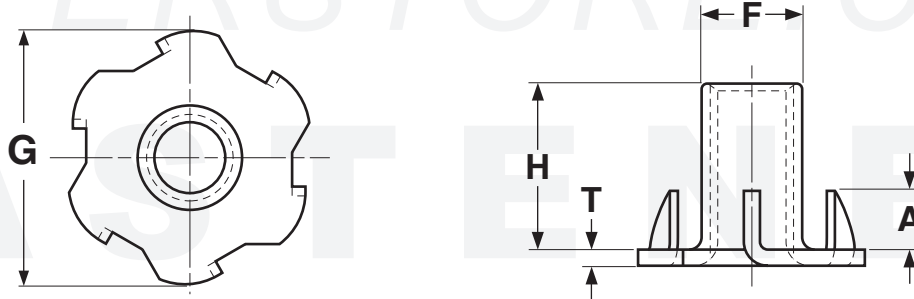

6-PRONG

6-PRONG T-NUTS, STRAIGHT BARREL

Part Number**	Thread Size	H	G	F	A	T	Drill Size	Part Number**	Thread Size	H	G	F	A	T	Drill Size
		Barrel Height (±1/32)	Flange Diam. (±1/32)	Barrel Diam. (±.015)	Prong Height (±1/32)	Material Thickness (±.015)				Barrel Height (±1/32)	Flange Diam. (±1/32)	Barrel Diam. (±.015)	Prong Height (±1/32)	Material Thickness (±.015)	
1404NT6	1/4-20	1/4	3/4	.305	3/16	.047	5/16	1407NT6	1/4-20	7/16	3/4	.305	7/32	.047	5/16
1405NT6	1/4-20	5/16	3/4	5/16	7/32	.047	5/16	1409NT6	1/4-20	9/16	3/4	.305	7/32	.047	5/16

**Last digit of part number denotes number of prongs.

Description	Internally threaded barrel-shaped fasteners integrally formed with a flat base, which has prong-type projections extending perpendicular from the base aside the barrel.
Applications/Advantages	Used for fastening metal to products made of wood, particle board or plastic. The 6-prong style is mainly used in softer plastics and relatively soft woods such as plywood and particleboard.
Material	C1004-10 low-carbon steel.
Plating	See Appendix-A for plating information.

NOTE: There is no single standard for T-nut dimensions. These values are offered as a guide; deviations from these specifications may occur.